

PART NUMBER

40KFH - 0 8 * T - * 2 1 L

SERIES ——— NO. OF POS. ——— CONTACT PLATED OPTION ——— LEAD FREE ——— TAPE REEL PACKAGE ——— SEE TABLE 1: ——— TIN PLATING ON SOLDER TAIL

1: 1~5u" GOLD FLASH
4: 15u" GOLD
6: 30u" GOLD

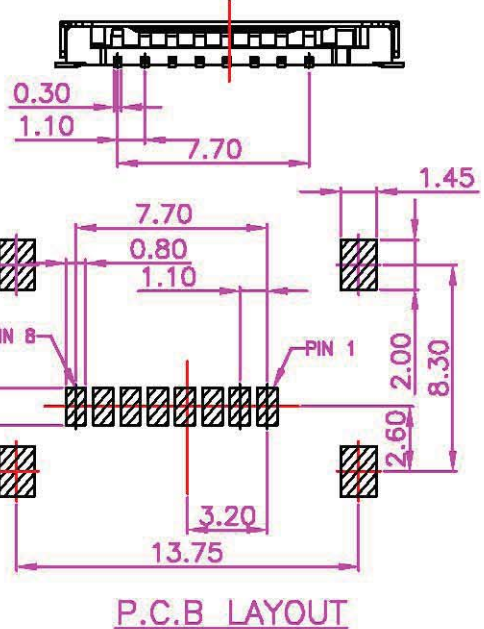


TABLE 1:

DIM A	P/N
1.80	1
1.60	2

TABLE 2:

PIN NO.	PIN Assignmng.
PIN1	DAT2
PIN2	CD/DAT3
PIN3	CMD
PIN4	VDD
PIN5	CLK
PIN6	Uss2
PIN7	DATO
PIN8	DAT1

MATERIALS

HOUSING: HIGH-TEMP. PLASTIC (UL 94V-0), BLACK
SHELL: STAINLESS STEEL, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA, TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 40m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -20°C~+85°C

<p>弘杰國際企業有限公司 SKY PARTNERSHIP INTERNATIONAL CO., LTD</p>		SERIES: MEMORY CARD CONNECTOR SERIES		
		TITLE: MICRO SD (T-FLASH), PCB MOUNT, SMT, METAL SHIELD, FEMALE, NON PUSH-PUSH TYPE		
LINEAR: X±0.30 .XX±0.20 .XXX±0.10	APPROVALS	SIZE: A4	VERSION: A	DWG NO. 40KF-002
ANGLES: ±3°	DRAWN: Simon	SCALE: NONE	UNIT: mm	SHEET: 1 OF 1
	CHECKED: Eric			
10204	APPROVED: James			

A	RELEASE	2011.7.18
REV.	DESCRIPTION	DATE